PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7:
A61F 2/00, D04B 21/00
A1
(11) International Publication Number: WO 00/57812
(43) International Publication Date: 5 October 2000 (05.10.00)

(21) International Application Number: PCT/US00/07937

(22) International Filing Date: 24 March 2000 (24.03.00)

(71) Applicant: ETHICON, INC. [US/US]; Route 22, Somerville,

26 March 1999 (26.03.99)

NJ 08876 (US).

(72) Inventors: VISHVAROOP, Agarwal; 2101 Chestnut Street

#1018, Philadelphia, PA 19103 (US). DOUGHERTY, Robert; 4996 Elderberry Drive, Reading, PA 19606 (US).

(74) Agents: CIAMPORCERO, Audley, A., Jr. et al.; Johnson and Johnson, One Johnson & Johnson Plaza, New Brunswick, NJ 08933 (US). (81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.


(54) Title: KNITTED SURGICAL MESH

(57) Abstract

(30) Priority Data:

09/277,671

A knitted surgical mesh formed from a yarn. The knitted mesh has from 18 to 24 courses per inch and from 12 to 16 wales per inch, a flexibility of from 400-950 mg-cm/cm, a burst strength greater than 175 pounds per square inch, and a pore size percentage greater than 37 %.

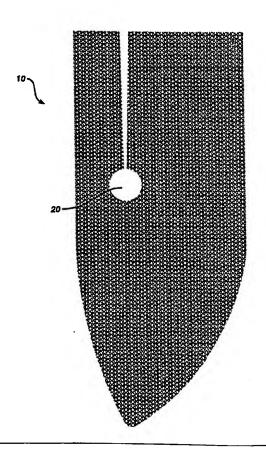

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

	AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
	AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
	AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
	ΑÜ	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
	AZ	Azerbaijan	GB	United Kingdom	MC	Мопасо	TD	Chad
	BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
	BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
	BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
ı	BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
	BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
	BJ	Benin	IE	Ireland	MN	Mongolia	UA.	Ukraine
	BR	Brazil	IL	Tsrael	MR	Mauritania	UG	Uganda
	BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
	CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
	CF	Central African Republic	JР	Japan	NE	Niger	VN	Viet Nam
	CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
	CH	Switzerland	KG	Kyrgyzstan	NO	Norway	zw	Zimbabwe
	CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand	2	Simolowe
ı	CM	Cameroon		Republic of Korea	PL	Poland		
ı	CN	China	KR	Republic of Korea	PT	Portugal		
1	CU	Cuba	KZ	Kazakstan	RO	Romania		
ı	CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
ı	DE	Germany	LI	Liechtenstein	SD	Sudan		
	DK	Denmark	LK	Sri Lanka	SE	Sweden		
ı	EE	Estonia	LR	Liberia	SG	Singapore		

KNITTED SURGICAL MESH

Field of the Invention

5

This invention relates to a textile material and, in particular, to a surgical mesh of knit construction fabricated from a polypropylene monofilament yarn.

Background

10

15

Hernia repairs are among the more common surgical operations which may employ a mesh fabric prosthesis. Such mesh fabric prostheses are also used in other surgical procedures including the repair of anatomical defects of the abdominal wall, diaphragm, and chest wall, correction of defects in the genitourinary system, and repair of traumatically damaged organs such as the spleen, liver or kidney.

20

25

Mesh fabrics for use in connection with hernia repairs are disclosed in U.S. Patent Nos. 5,292,328, 4,769,038 and 2,671,444. Knitted and woven fabrics constructed from a variety of synthetic fibers and the use of the fabrics, in surgical repair are also discussed in U.S. Patent Nos. 3,054,406; 3,124,136; 4,193,137; 4,347,847; 4,452,245; 4,520,821; 4,633,873; 4,652,264; 4,655,221; 4,838,884;. 5,002,551; and European Patent Application No. 334,046.

10

15

20

25

- 2 -

It is desirable for a surgical mesh fabric prosthesis to exhibit certain properties and characteristics. In particular, the mesh should have a burst strength sufficient to ensure that the mesh does not break or tear after insertion into a patient. The mesh should also have a pore size which allows tissue to penetrate or "grow through" the mesh, after the mesh has been inserted into a patient. In addition, the mesh should be constructed so as to provide memory (ability to resume it's shape after deformation), thereby facilitating the insertion of the mesh prosthesis into a patient during a surgical operation.

It is an object of the present invention to provide a knitted surgical mesh having a high burst strength and large pore size, which has a greater flexibility than known knitted surgical mesh fabrics.

These and other objects and advantages of the invention will become more fully apparent from the description and claims which follow or may be learned by the practice of the invention.

Summary of the Invention

The present invention is directed to a knitted surgical mesh formed from a yarn. The knitted mesh has from 18 to 24 courses per inch and from 12 to 16 wales per inch, a flexibility of from 400 to 950 mg-cm, a burst strength

10

15

20

25

greater than 175 pounds per square inch, and a pore size percentage greater than 37%.

Brief Description Of The Drawings

In order that the manner in which the above-recited and other advantages and objects of the invention are obtained and can be appreciated, a more particular description of the invention briefly described above will be rendered by reference to a specific embodiment thereof which is illustrated in the appended drawings. Understanding that these drawings depict only a typical embodiment of the invention and are not therefore to be considered limiting of its scope, the invention and the presently understood best mode thereof will be described and explained with additional specificity and detail through the use of the accompanying drawings.

Figure 1 is a diagram showing a knitted surgical mesh, in accordance with a preferred embodiment of the present invention.

Figure 2 is an enlarged view of a portion of the surgical mesh shown in Figure 1.

Description Of The Preferred Embodiments

The surgical mesh of this invention is preferably fabricated from a yarn that is biocompatible. Preferred are yarns that

. WO 00/57812

5

10

15

20

25

have already been accepted for use as a suture material. Numerous biocompatible absorbable and nonabsorbable yarns can be used to make the surgical meshes described hereinafter. Suitable nonabsorbable materials for use in the present invention include, but are not limited to, cotton, linen, silk, polyamides (polyhexamethylene adipamide (nylon 66), polyhexamethylene sebacamide (nylon 610), polycapramide (nylon 6), polydodecanamide (nylon 12) and polyhexamethylene isophthalamide (nylon 61) copolymers and blends thereof), polyesters (e.g. polyethylene terephthalate, polybutyl terephthalate, copolymers and blends thereof), fluoropolymers (e.g. polytetrafluoroethylene and polyvinylidene fluoride) polyolefins (e.g. polypropylene including isotactic and syndiotactic polypropylene and blends thereof, as well as, blends composed predominately of isotactic or syndiotactic polypropylene blended with heterotactic polypropylene (such as are described in U.S. Patent 4,557,264 issued December 10, 1985 assigned to Ethicon, Inc. hereby incorporated by reference) and polyethylene (such as is described in U.S. Patent 4,557,264 issued December 10, 1985 assigned to Ethicon, Inc. hereby incorporated by reference)) and combinations thereof. The preferred method for preparing the flexible polypropylene sutures of the present invention utilizes as the raw material pellets of isotactic polypropylene homopolymer having a weight average molecular weight of from about 260,00 to about 420,000. Polypropylene of the desired grade is commercially available in both

10

15

20

25

powder and pellet form. Suitable absorbable materials for use as yarns include but are not limited to aliphatic polyesters which include but are not limited to homopolymers and copolymers of lactide (which includes lactic acid d-, land meso lactide), glycolide (including glycolic acid), &caprolactone, p-dioxanone (1,4-dioxan-2-one), trimethylene carbonate (1,3-dioxan-2-one), alkyl derivatives of trimethylene carbonate, δ -valerolactone, β -butyrolactone, γ butyrolactone, &-decalactone, hydroxybutyrate, hydroxyvalerate, 1,4-dioxepan-2-one (including its dimer 1,5,8,12-tetraoxacyclotetradecane-7,14-dione), 1,5-dioxepan-2-one, 6,6-dimethyl-1,4-dioxan-2-one and polymer blends thereof. Fibers and/or yarns may be made from absorbable and nonabsorbable materials described above in heterologous yarns or bicomponent yarns. Additionally, fibers with different materials used in the sheath and core may also be used for the inventive surgical meshes.

In a preferred embodiment, the surgical mesh is fabricated from a monofilament yarn formed from a polypropylene resin, such as that disclosed in U.S. Patent No. 4,911,165, entitled "Pliablized Polypropylene Surgical Filaments" and assigned to Ethicon, Inc., the contents of which is hereby incorporated in its entirety by reference. The preferred monofilament polypropylene yarn used has a denier of from about 30 to 300, and more preferably a denier of about 110. Alternatively, a multifilament yarn, such as a multifilament polypropylene yarn may be used to fabricate a surgical mesh in accordance with the present invention.

Lubricants are commonly applied to these yarns before the yarns are knitted. Suitable lubricants can be either nontoxic hydrophobic lubricants such as waxes (i.e. low-melting hydrocarbons or esters of fatty acids alcohols or blends thereof such as Ethasew wax) or hydrophilic lubricants such as polyalkyl glycols i.e. polyethylene glycol with a molecular weight of from about 200 to 10,000 (as described in WO 98/37813 hereby incorporated by reference). The preferred lubricant is Ethasew wax which is a mixture of 50 percent sorbitan monopalmitate, 20 percent sorbitan tri-stearate and 30 percent sorbitan tri-stearate containing 20 mole percent ethylene oxide.

15

20

25

10

5

The surgical mesh of this invention is preferably fabricated from a 110 denier monofilament polypropylene yarn by employing known and conventional warp knitting apparatus and techniques, such as the tricot and Raschel knitting machines and procedures described in "Warp Knitting Production" by Dr. S. Raz, Melliand Textilberichte GmbH, Rohrbacher Str. 76, D-6900 Heidelberg, Germany (1987), the contents of which are incorporated by reference herein. As is well known in the art of warp knitting, the number of courses and wales per inch in a knitted material is affected by a number of machine operating variables such as the rate at which the fabric is drawn away from the needles, the number of needles per inch, the amount of tension applied to the warp yarns and other variables after the fabric leaves

the machine, e.g., the heat setting conditions. In the preferred embodiment of the present invention, the preferred polypropylene monofilament yarn described above is warp knitted, preferably tricot knitted on a 2 bar set-up, in accordance with the parameters set forth in Table I below:

TABLE I

Courses per Inch	Wales per Inch	Back Bar	Front Bar
		1/0	1/2
18-24	12-16	2/3	1/0

10

5

Following knitting, the mesh is cleaned or scoured, and thereafter annealed to stabilize the fabric. For the latter operation, the mesh can be secured to a tenter frame which maintains the mesh at a predetermined width, the frame then being passed through an elongated heating zone at a temperature of from about 100°C to about 160°C, preferably at a temperature of from about 120°C to about 150°C, at a rate providing a dwell time of from about 0.5 to about 60 minutes and preferably from about 1.5 to about 25 minutes. Following heat setting, the mesh is cut to size, packaged and sterilized.

20

15

The mesh can be cut to any desired configuration, e.g., a square or rectangular shape of appropriate dimensions. A preferred configuration 10 having a key-hole opening 20 is shown in Fig. 1. An ultrasonic slitter may be employed to

25

10

15

20

25

cut the mesh, various types of which are commercially available. Unlike the result one obtains when cutting with a blade, i.e., frayed yarn ends, or when the yarn ends are heat-sealed, i.e., bead-like formations, cutting the mesh to size with an ultrasonic cutter avoids both frayed and beaded ends.

The polypropylene monofilament knitted mesh fabricated as described above exhibits good memory. Depending on the yarn used to form the mesh, a mesh formed in accordance with Table I above preferably has a flexibility of about 400-950 In addition, depending on the yarn used to form the mesh, a mesh formed in accordance with Table I above preferably has a burst strength of about 175-250 pounds per square inch and, when the 110 denier monofilament yarn described above is used, the mesh has a mean burst strength of 240 pounds per square inch which varies between about 210 to 250 pounds per square inch depending on the sample. Finally, depending on the yarn used to form the mesh, a mesh formed in accordance with Table I above preferably has a pore size percentage of from about 37% to 50%, and, when the 110 denier monofilament yarn described above is used the mesh has a pore size of about 47%. The polypropylene monofilament knitted mesh fabricated as described above preferably possesses a thickness of from 18 to 25 mils depending on the particular yarn used, and when the 110 denier monofilament yarn described above is used, the mesh has a mean thickness of 20 mils which varies between about

18 to 21 mils depending on the sample. The pore size percentage is the percentage of the area in the plane of the mesh not blocked by the fibers of the knitted mesh. The flexibility, burst strength and pore size characteristics for a mesh fabric, fabricated as described above and other meshes that are currently commercially available, are compared in Table II set forth below:

Table II

Mesh Fabric	Average Flexibility (mg-cm/cm)	Burst Strength (PSI)	Pore Size	Thickness (Mils)
Present Invention	520	240	47.1	20.0
MARLEX™ Mesh (mfd. by C.R. Bard)	786.3	186	41.3	25.9
PROLENE™ Mesh (mfd. by Ethicon, Inc.)	678.0	257	49.73	24.1

10

5

As shown in Table II, the mesh of the present invention has: (i) a significantly better flexibility than the PROLENETM and MARLEXTM surgical mesh fabrics, and (ii) a significantly higher burst strength and pore size percentage than the MARLEXTM mesh fabric.

20

15

Furthermore, it is to be understood that although the present invention has been described with reference to a preferred embodiment, various modifications, known to those skilled in the art, may be made to the structures and

process steps presented herein without departing from the invention as recited in the several claims appended hereto.

15

20

25

What is claimed is:

- 1. A knitted surgical mesh comprised of a knitted yarn, the knitted mesh having from 19 to about 24 courses per inch and from 12 to 16 wales per inch two bar warp knit construction with a bar pattern set-up of back bar 1/0, 2/3; front bar 1/2, 1/0.
- 10 2. The knitted surgical mesh of claim 1, wherein the pore size percentage mesh is from about 35% to 60%
 - 3. The knitted surgical mesh of claim 2, wherein the pore size percentage of the mesh is from about 45% to about 50%.
 - 4. The knitted surgical mesh of claim 1, wherein the mesh has a burst strength from 210 to 250 pounds per square inch.
 - 5. The knitted surgical mesh of claim 1, wherein the mesh has a thickness of from 18 to 25 mils.
 - 6. The knitted surgical mesh of claim 5, wherein the thickness of the mesh is from 18 to 21 mils.
 - 7. The surgical mesh of claim 1, wherein the yarn is a polypropylene yarn.

20

- 8. The surgical mesh of claim 7, wherein the yarn is a monofilament polypropylene yarn.
- 5 9. The surgical mesh of claim 8, wherein the yarn has a denier of from 30 to 300.
 - 10. The surgical mesh of claim 1, wherein the mesh includes a key-hole shaped opening within an interior region of the mesh.
 - 11. The surgical mesh of claim 1, wherein the yarn is a multifilament yarn.
- 15 12. The surgical mesh of claim 1, wherein the yarn is a monofilament yarn.
 - 13. The surgical mesh of claim 1, wherein the yarn is a nonabsorbable yarn made from a material selected from the group consisting of cotton, linen, silk, polyamides, polyesters, fluoropolymers, polyolefins and combinations thereof.
- 14. The surgical mesh of claim 1, wherein the yarn is
 25 an absorbable yarn made from a material selected from the
 group consisting of homopolymers and copolymers of lactide
 (which includes lactic acid d-, l- and meso lactide),
 glycolide (including glycolic acid), ε-caprolactone, p-

10

dioxanone (1,4-dioxan-2-one), trimethylene carbonate (1,3-dioxan-2-one), alkyl derivatives of trimethylene carbonate, δ -valerolactone, β -butyrolactone, γ -butyrolactone, ϵ -decalactone, hydroxybutyrate, hydroxyvalerate, 1,4-dioxepan-2-one (including its dimer 1,5,8,12-tetraoxacyclotetradecane-7,14-dione), 1,5-dioxepan-2-one, 6,6-dimethyl-1,4-dioxan-2-one and polymer blends thereof.

- 15. The surgical mesh of claim 11, wherein the yarn is made from polypropylene fiber.
 - 16. The surgical mesh of claim 12, wherein the yarn is made from polypropylene fiber.

FIG. 1


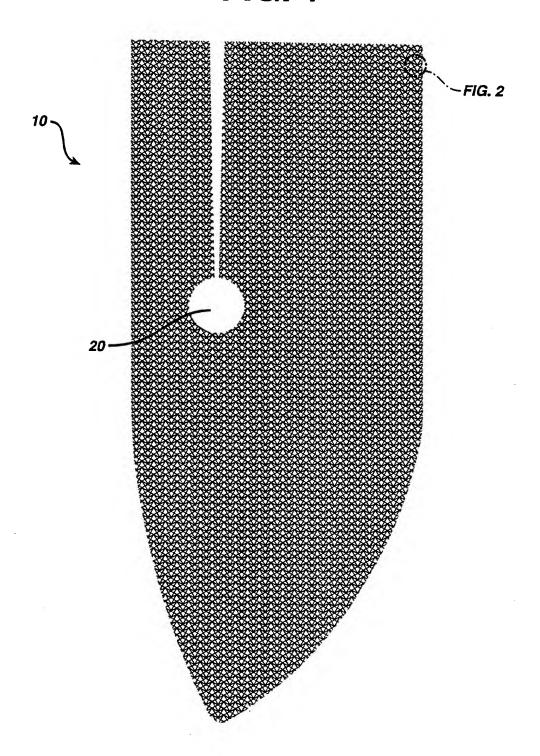


FIG. 2

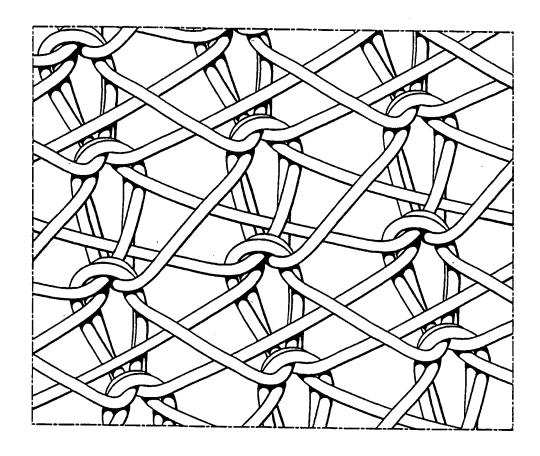

INTERNATIONAL SEARCH REPORT

Inte. onal Application No PCT/US 00/07937

A. CLASS IPC 7	IFICATION OF SUBJECT MATTER A61F2/00 D04B21/00		
	o International Patent Classification (IPC) or to both national classific	cation and IPC	·
	SEARCHED		
IPC 7	ocumentation searched (classification system followed by classificat A61F D04B		
	tion searched other than minimum documentation to the extent that		
	lata base consulted during the international search (name of data bata, EPO-Internal	ase and, where practical, s	earch terms used)
C. DOCUM	ENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the re-	levant passages	Relevant to claim No.
X	WO 98 14134 A (ETHICON, INC.) 9 April 1998 (1998-04-09) the whole document		1-16
Х	US 4 347 847 A (USHER) 7 September 1982 (1982-09-07) cited in the application the whole document		1,7,8, 12,13,16
X	EP 0 537 769 A (UNITED STATES SUF CORPORATION) 21 April 1993 (1993- the whole document	RGIAL -04-21)	1,7,11, 13,15
A	US 5 456 711 A (HUDSON) 10 October 1995 (1995-10-10)		
А	EP 0 159 502 A (AMERICAN CYANAMIE 30 October 1985 (1985-10-30)	O COMPANY)	
Furth	ner documents are listed in the continuation of box C.	X Patent family me	embers are listed in annex.
Special car	tegories of cited documents:	*T* lease de	
conside	int defining the general state of the art which is not ered to be of particular relevance locument but published on or after the international	or priority date and no cited to understand the invention	hed after the international filing date of in conflict with the application but the principle or theory underlying the
filing d	ate nt which may throw doubts on priority claim(s) or	cannot be considered	r relevance; the claimed invention d novel or cannot be considered to
which i	s cited to establish the publication date of another or other special reason (as specified)	"Y" document of particular	step when the document is taken alone r relevance; the claimed invention d to involve an inventive step when the
other n	ent referring to an oral disclosure, use, exhibition or neans nt published prior to the international filling date but	document is combine	ed with one or more other such docu- ation being obvious to a person skilled
later th	an the priority date claimed	"&" document member of	the same patent family
Date of the a	ctual completion of the international search	Date of mailing of the	International search report
26	5 July 2000	01/08/200	00
Name and m	nailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2	Authorized officer	
	NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl. Fax: (+31-70) 340-3016	Smith, C	

INTERNATIONAL SEARCH REPORT

information on patent family members

Inter anal Application No PCT/US 00/07937

WO 9814134 A 09-04-1998 US 4347847 A 07-09-1982 EP 537769 A 21-04-1993 US 5456711 A 10-10-1995 EP 159502 A 30-10-1985	NONE US 4452245 A US 5292328 A CA 2079279 A DE 69225106 D DE 69225106 T ES 2114902 T NONE US 4633873 A AU 574457 B AU 4164185 A CA 1322915 A DE 3587563 D	05-06-1984 08-03-1994 19-04-1993 20-05-1998 17-09-1998 16-06-1998 06-01-1987 07-07-1988 31-10-1985 12-10-1993
EP 537769 A 21-04-1993 US 5456711 A 10-10-1995	US 5292328 A CA 2079279 A DE 69225106 D DE 69225106 T ES 2114902 T NONE US 4633873 A AU 574457 B AU 4164185 A CA 1322915 A	08-03-1994 19-04-1993 20-05-1998 17-09-1998 16-06-1998
US 5456711 A 10-10-1995	CA 2079279 A DE 69225106 D DE 69225106 T ES 2114902 T NONE US 4633873 A AU 574457 B AU 4164185 A CA 1322915 A	19-04-1993 20-05-1998 17-09-1998 16-06-1998 06-01-1987 07-07-1988 31-10-1993
	DE 69225106 D DE 69225106 T ES 2114902 T NONE US 4633873 A AU 574457 B AU 4164185 A CA 1322915 A	19-04-1993 20-05-1998 17-09-1998 16-06-1998 06-01-1987 07-07-1988 31-10-1993
	DE 69225106 T ES 2114902 T NONE US 4633873 A AU 574457 B AU 4164185 A CA 1322915 A	17-09-1998 16-06-1998
	NONE US 4633873 A AU 574457 B AU 4164185 A CA 1322915 A	16-06-1998 06-01-1987 07-07-1988 31-10-1985 12-10-1993
	NONE US 4633873 A AU 574457 B AU 4164185 A CA 1322915 A	06-01-1987 07-07-1988 31-10-1985 12-10-1993
	US 4633873 A AU 574457 B AU 4164185 A CA 1322915 A	07-07-1988 31-10-1985 12-10-1993
EP 159502 A 30-10-1985	AU 574457 B AU 4164185 A CA 1322915 A	07-07-1988 31-10-1985 12-10-1993
	AU 574457 B AU 4164185 A CA 1322915 A	07-07-1988 31-10-1985 12-10-1993
	CA 1322915 A	31-10-1985 12-10-1993
	DE 3587563 D	
		14-10-1993
	DE 3587563 T	14-04-1994
	DK 186385 A	27-10-1985
	ES 542568 D	16-05-1986
	ES 8606919 A	16-10-1986
	FI 851633 A,	
	GR 850997 A	25-11-1985
	HK 67895 A	12-05-1995
	IL 74752 A	16-08-1991
	JP 5054352 B	12-08-1993
	JP 60234667 A	21-11-1985
	JP 2000093496 A	04-04-2000
	KR 9300688 B	29-01-1993
	NO 851663 A,	
	PH 23747 A	03-11-1989
	PT 80340 A,	
	SG 9590511 A	18-08-1995
	US 4838884 A ZA 8503112 A	13-06-1989 24-12-1985